

REPLACEMENT INSTRUCTIONS:

Telescoping Rack

Find repair video on [Rack Replacement](http://www.dreamduffel.com) product page at www.dreamduffel.com

PARTS INCLUDE:

- 1 Telescoping Rack
- 2 Silver Bolts w/ Plastic Washer
- 2 Black Washers
- 2 Small Metal Nuts

YOU WILL NEED:

- Electric Drill and Phillips Screwdriver Bit
- OR
- Phillipshead Screwdriver




INSTRUCTIONS:


1. Pull back Velcro lining inside your Dream Duffel.
2. From exterior of duffel, use drill or screwdriver to remove hardware (Picture #1).
***NOTE** If necessary, some older models require you to remove the interior rack base screw (arrow in Picture #2).*
3. Remove your damaged rack base and then insert the new one the same way (Picture #3).
(The two holes on the cross section of your new rack should line up with the two holes in your Dream Duffel made by the old, removed hardware or rivets).
4. Insert silver bolts and black washers from the outside of the duffel, and secure on the inside with the small metal nuts (See picture #2).
5. Using drill or screwdriver, secure hardware in place from the outside (Picture #1).



Picture #1 - Remove Hardware
Rack Hardware - Exterior view

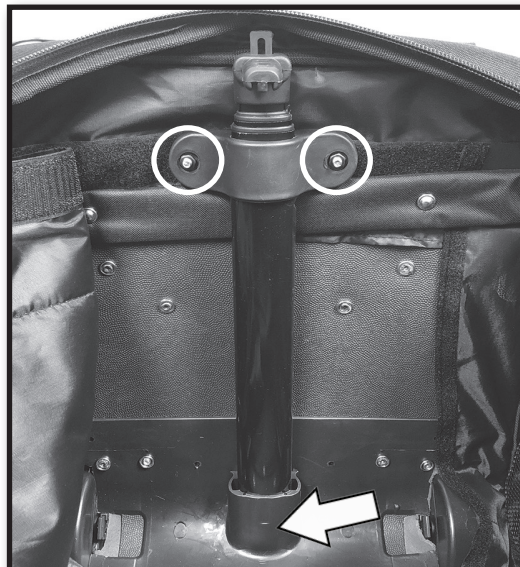

Picture #2 - Interior Rack Base
Circled: Rack Hardware - Interior view
Arrow: Base screw location, if yours has one

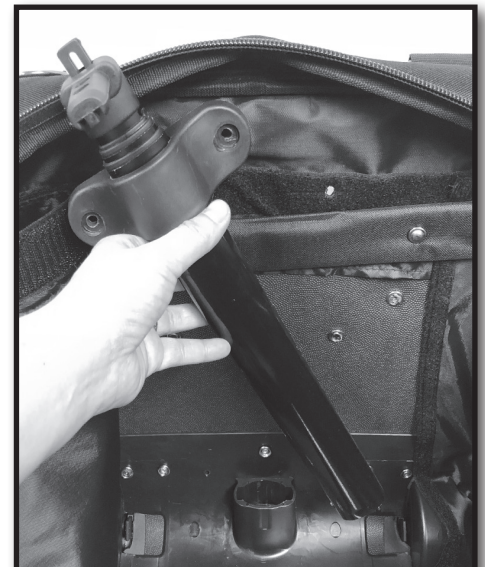

Picture #3 - Rack Removed

13800 24th Ave. N. Suite #330 | Plymouth, MN 55441

Phone: 1-877-378-1260 | Email: info@dreamduffel.com | Website: www.dreamduffel.com